

bourdon tube "solid-front" pressure gauges turret case DS 4.5" (125 mm)



These instruments are built in conformity with the construction and safety specifications of **ASME B40.1**.

In the event of leaks or a rupture of the elastic element, the operator is protected by a solid-front stainless steel safety cell and a blow-out back. They are commonly used in the chemical and petrochemical industries, as well as in conventional power plants.

The TIG welding between the safety cell and the process socket reinforces the instrument and ensures better sealing in the presence of a damping fluid. In environments with vibrations, filling the case with a damping fluid is recommended to stabilize the pointer and prevent wear of rotating components.

1.30.2 - Fillable Model - Lower connection only

Design: ASME B40.1

Ranges: from 0...15 to 0...30000 psi; (from 0...0,6 to 0...1600 bar or other equivalent units).

Accuracy: 2A grade as per ASME B40.1 ($\pm 0,5\%$ of FSV).

Ambient temperature: -22...+149°F (-30...+65°C).

Process fluid temperature: -22...302°F (-30...+150°C max).

Working pressure:

100% del FSV for static pressure;

90% del FSV for pulsating pressure.

Overpressure: 30% of FSV (max 12 h).

Protection degree: IP 67 as per IEC 529.

Socket material: AISI 316L st.st.

Bourdon tube: AISI 316L st.st. seamless tube.

Case and blow out disk: strengthened polyamide with fiber glass, UV rays stabilized.

Ring: strengthened polypropylene, fiber glass.

Safety cell: stainless steel.

Window: tempered glass.

Movement: stainless steel with internal limit stops for minimum and maximum pressure.

Dial: aluminium, white with black markings.

Pointer: adjustable, aluminium, black.

1.30.3 - Filled Model - Lower connection only

Ranges: from 0...15 to 0...30000 psi; (from 0...1 to 0...1600 bar or other equivalent units).

Accuracy: 1A grade as per ASME B40.1 ($\pm 1,0\%$ of FSV).

Filling liquid: glycerine 98%, and silicon oil or Fluorinated fluid on request.

Ambient temperature:

+32...+149°F (0...+65 °C) with glycerine filling;

-22...+149°F (-30...+65 °C) with silicon oil filling;

-22...+149°F (-30...+65 °C) with fluorinated fluid filling.

Process fluid temperature: +149°F (+65 °C).

Compensating device: gum.

Other features: as Fillable Model.

1.30.1 - Standard Model - Back connection only

Protection degree: IP 55 as per IEC 529.

Case: phenolic resin.

Ring and blow out disk: strengthened polypropylene, fiber glass.

Safety cell: not available.

Separating wall: phenolic resin.


Other features: as Fillable Model.

OXYGEN INSTRUMENTS

Glycerine and silicon oil should not be used with highly oxidizing agents as oxygen, chlorine, nitric acid or hydrogen peroxide because of danger of spontaneous chemical reaction, inflammability or explosion. The use of fluorinated fluid is recommended in these cases.

bourdon tube "solid-front" pressure gauges
turret case, DS 4.5" (125 mm)

MGS30

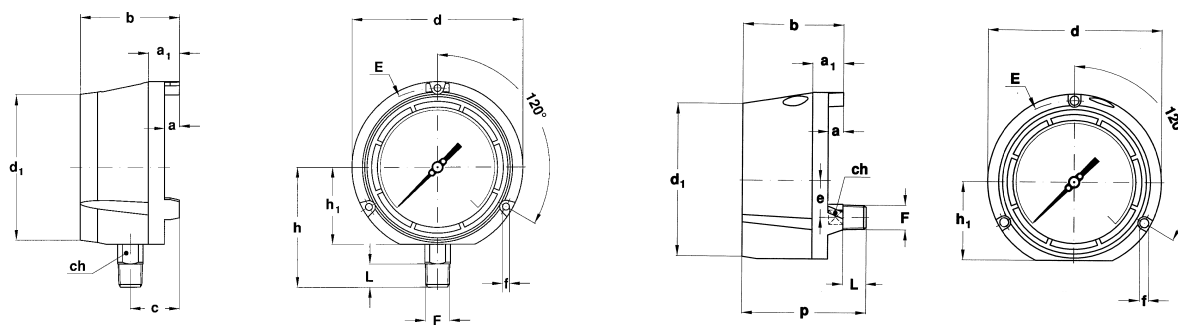

A - LOWER CONNECTION

D - BACK CONNECTION

Mounting	F	a	a ₁	b	c	d	d ₁	e	E	f	h	h ₁	ch	p	Weight (1)	
Lower	23M 1/4-18 NPT	0.51"	1.06"	3.38"	1.65"	5.82"	4.96"		5.39"	0.25"	4.07"	2.61"	0.86"		0.78"	1.78 lbs
		(13)	(27)	(86)	(42)	(148)	(126)		(137)	(6,5)	(103,5)	(66,5)	(22)		(20)	(0,81 kg)
Back	43M 1/2-14 NPT	0.51"	1.06"	3.38"		5.82"	5.07"	1.22"		0.23"		2.61"	0.66"	4.17"	0.78"	1.78 lbs
		(13)	(27)	(86)		(148)	(129)	(31)		(6)		(66,5)	(17)	(106)	(20)	(0,81 kg)

dimensions : inches (mm)

(1) add 1.10 lbs (0,5 kg) when filled.

OPTIONS

Model	standard	fillable	filled
F11 - Panel mounting kit	◆	◆	◆
F30 - Fluorinated fluid filling			◆
P01 - Suitable for silicone filling		◆	
P02 - Oxygen service (3)	◆	◆(1)	◆(2)
FDP - Blow out disk with compensating device		◆	◆
F30 - Over pressure limit: 50% of FSV for pressure ranges < 6000 psi (400 bar)	◆	◆	◆
S10 - Silicone filling			◆
T01 - Tropicalization	◆	◆	◆
T32 - Safety glass window	◆	◆	◆

(1) to be ordered with instruments suitable for fluorinated fluid filling

(2) to be ordered with fluorinated fluid filled instruments

(3) For pressure ranges up to 15000 psi (1000 bar)

"HOW TO ORDER" SEQUENCE

Section / Model / Case / Mounting / Diameter / Range / Process connection / Options
 1 30 1 A F 41M K03...T32
 2 D 43M
 3

